

*Cote only*

(12) **UK Patent Application** (19) **GB** (11) **2 327 289** (13) **A**

(43) Date of A Publication 20.01.1999

(21) Application No 9815072.5

(22) Date of Filing 10.07.1998

(30) Priority Data

(31) 09189639 (32) 15.07.1997 (33) JP  
(31) 09189642 (32) 15.07.1997  
(31) 09189647 (32) 15.07.1997

(71) Applicant(s)

**Honda Giken Kogyo Kabushiki Kaisha**  
(Incorporated in Japan)  
1-1 Minami Aoyama 2-chome, Minato-ku,  
Tokyo 107-8556, Japan

(72) Inventor(s)

**Masao Nitta**  
**Kou Namiki**  
**Hiroshi Hamano**  
**Tadatoshi Tsuji**  
**Toshiyuki Higashi**

(51) INT CL<sup>6</sup>

**G09B 19/00**

(52) UK CL (Edition Q)

**G5G G17**  
**G3N NG1A1 N387 N393**

(56) Documents Cited

**GB 1569065 A** **GB 1419064 A** **GB 1254445 A**  
**US 5475797 A** **US 4359319 A**

(58) Field of Search

**UK CL (Edition P) G3N NGBC3 NG1A1 , G5G G13 G17**  
**INT CL<sup>6</sup> G09B 19/00**  
**ONLINE: WPI**


(74) Agent and/or Address for Service

**Page White & Farrer**  
**54 Doughty Street, LONDON, WC1N 2LS,**  
**United Kingdom**

(54) Abstract Title

**Job Aiding Apparatus for Assembly Line**

(57) A display unit of a job aiding apparatus disposed at each work station of an assembly line, Fig.1 (not shown) provides a job detail image (52) for showing an instructional picture for the job in hand and a job result display image (82) for showing an entered result. The worker in each of the work stations can perform a job easily according to the job detail shown in the job detail display image, and can easily and accurately confirm the job result according to the job result in the job result display image. In Fig.13, it is a torque setting which can be entered by the worker and compared with the prescribed value ; other examples, Figs. 6 and 9 (not shown) may enable a check that the correct component has been chosen or that an assembled component does not provide a pressure leak.

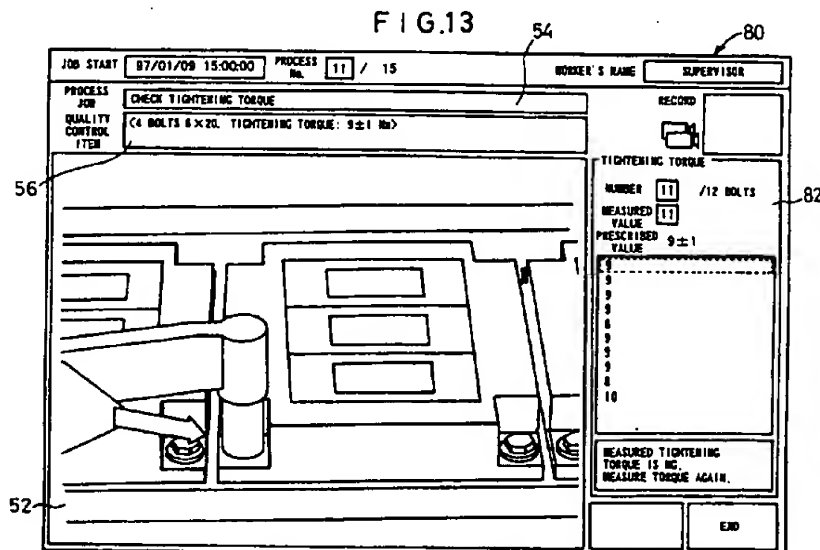

*automated task instruction system*